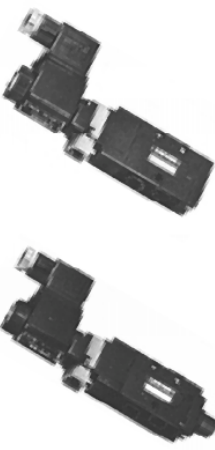





Typ	An- schlüsse	Symbol	Steuer. (12)	Rücklauf (10)	Wege	Ø mm	Durchfluß (l/min)	Druck bar	Schaltzeiten ms Err. (12) Aberr. (10)	Hand- betät.	Masse kg	Artikelnr.	
Einseitiger elektrischer Impuls - Spule in Linie / L													
	G 1/8		elekt. verstärkt Spule in Linie	pneum. Feder	3/2 NC	6,5	890	2,3+10	23	19	⊖ ⌞	0,230	CL-340 CL-340R
	G 1/4					8,5	1480	2+10	24	28	⊖ ⌞	0,300	CL-9340 CL-9340R
	G 1/8			pneum. Feder	3/2 NO	6,5	890	2,3+10	23	19	⊖ ⌞	0,230	CL-341 CL-341R
	G 1/4					8,5	1480	2+10	24	28	⊖ ⌞	0,300	CL-9341 CL-9341R
	G 1/8			mechan. Feder	3/2 NC-NO	6,5	890	2,5+10	20	24	⊖ ⌞	0,240	CL-342A CL-342R
	G 1/4					8,5	1480	2+10	22	35	⊖ ⌞	0,260	CL-9342A CL-9342R